
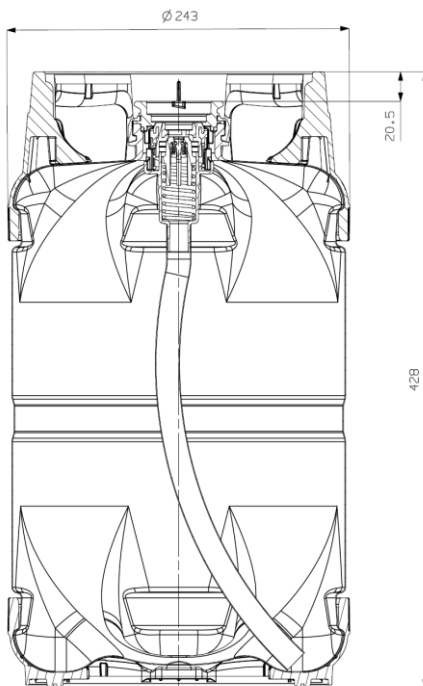


Dolium® 12,5L S Slim Line

PRODUCT NUMBER : 10-12,5S-21

Characteristics

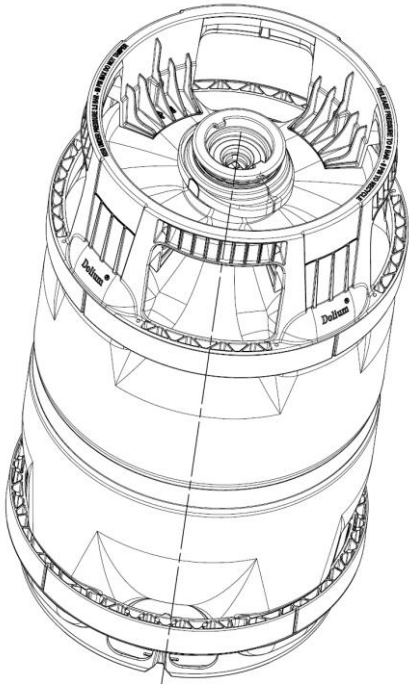

KEG

| | |
|-----------------------|-------------------------|
| Cycle | single use |
| Volume | 12,5L |
| Dimensions | D x H = 243 x 428 mm |
| Weight (empty) | 1,20 kg |
| Temperature | 0°C < T < 35°C |
| Pre- pressure | 1,0 bar CO ₂ |
| Working pressure | 3,5 bar max. |
| Pressure Relief Valve | 5,2 bar +/- 0,2 bar |

CONTAINER

| | |
|----------------|------------------|
| Oxygen ingress | Active barrier |
| Carbondioxide | Passive barrier |
| UV ingress | UV light barrier |

CONNECTION

| | |
|------|---------------------------|
| Type | Well type = S(ankey)-type |
|------|---------------------------|

CHIMES

| | |
|----------|-------------------------|
| Handling | vertical and horizontal |
| Storage | stackable |

APPLICATIONS

| | |
|----------------------|--------------------------------|
| Products | Beverages |
| Shelf life | Equal to stainless steel |
| Certificates | EU / FDA |
| Filling line | compatible - check recommended |
| Draught installation | compatible |
| Recycable | 100% |

for further detailed information please see Handling & Safety instructions

Special features

Contact

Dispack-projects NV

Address: Vosseschijnstraat 192A
 Town: 2030, Antwerpen
 Country: Belgium

E-mail: sales@dolium.eu
 Website: www.dolium.eu